


## Seals & Tape

### MF-S1 Compression Seal

The MF-S1 Compression Seal is used primarily in the sealing of butt joints. The unique geometry of the seal allows gaps between 3-9mm to be sealed effectively. Minimal force is required to achieve seal compression.


- Emission free (Certified for permanent museum use)
- Suitable for interior and exterior applications
- Attached using MF-T8, a double-sided clear adhesive tape
- Available in clear (Black and grey available upon request)
- Available in rolls of 25 metres (82 feet)

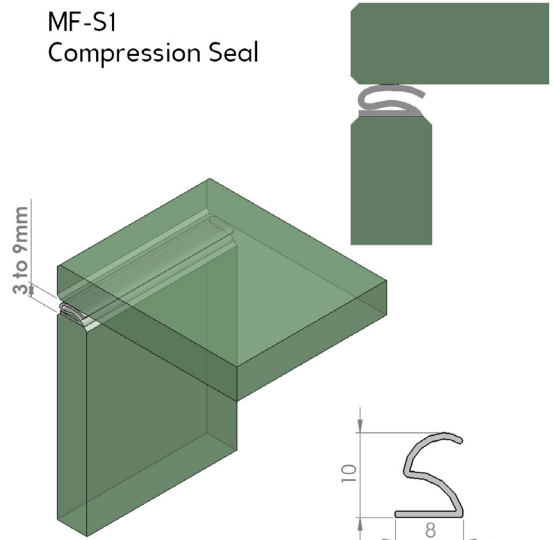

### MF-S2 Brush/Swipe Seal

The MF-S2 Brush/Swipe Seal is attached to the leading edge of glass panels. A perfect fit is ensured in the closed door position, while allowing doors to be opened and closed with minimal seal resistance. The MF-S2 Seal can be used on a single edge (for gaps between 3-5mm) or both opposing edges (for gaps between 8-10mm) of the doors. The seal is made from age-resistant permanent elastic silicon that ensures high durability sealing.


- Emission free (Certified for permanent museum use)
- Suitable for interior and exterior applications
- Attached using MF-T8, a double-sided clear adhesive tape
- Available in clear (Black and grey available upon request)
- Available in rolls of 25 metres (82 feet)

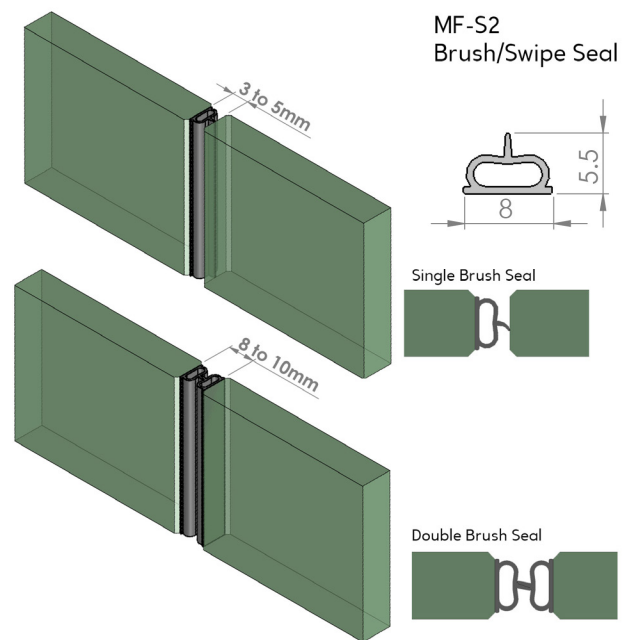

### MF-T8 Adhesive Tape

The MF-T8 adhesive tape is designed specifically for use with silicone seals. It has a firm, silicone pressure sensitive adhesive coated on one side of a polyester film carrier and a high performance acrylic adhesive coated on the other side.

- Emission free (Certified for permanent museum use)
- For use with all Manfred Frank Seals
- Available in clear
- Available in rolls of 33 metres (108 feet)

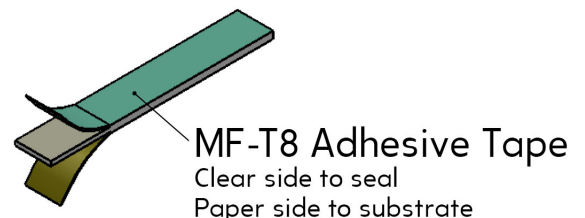

FOR MORE INFORMATION GO TO  
[www.manfredfrank.com](http://www.manfredfrank.com)